

SHOW OFF

Heavy Duty No-Rinse Speed Stripper



Product Description

This product is the most effective labor saving stripper ever developed. Virtually eliminates the need for floor machines, pads, and rinsing. It will solubilize aged and built-up finishes and waxes almost instantly. Can be sprayed on cove moldings to soften and remove accumulations of old finishes and waxes. Can be used with or without a floor machine. Removes water-based concrete sealers from resilient, terrazzo, and concrete floors.

Directions For Use

The desired concentration will depend on the build-up and age of the polish film. As a starting point dilute with cold water as follows:

FOR AVERAGE BUILD-UPS - Dilute 1 to 3 with cold water.

FOR MODERATE BUILD-UPS - Dilute 1 to 2 with cold water.

FOR HEAVY AGED BUILD-UPS - Dilute 1 to 1 with cold water.

FOR USE WITH A FLOOR MACHINE - Dilute 1 to 8-16 parts cold water.

Mop a generous solution onto the floor to be stripped. Allow solution to stand about 5 minutes keeping the floor wet at all times. If mop stripping - agitate with the mop. If using an automatic scrubber or rotary floor machine, no mop agitation is required. Pick-up the solution with a wet vacuum, automatic scrubber or clean mop. Allow floor to dry thoroughly prior to applying any sealer or finish. If desired, a rinsing step can be added.

NOTE: Asphalt tile and rubber flooring could be affected by stripping solutions in high concentrations. Always test floor before proceeding.

For Use On

Vinyl Asbestos	Terrazzo	Flagstone
Linoleum	Vinyl	Ceramic Tile
Asphalt Tile (test first)	Concrete	
Rubber (test first)	Sealed Wood	

Authorizations

Technical Data

TEST:

Active Ingredients:

Color:

Odor:

Viscosity:

pH (concentrate):

Foam:

Abrasives:

Phosphate Content:

Solubility:

Emulsification:

LIMIT:

50.0 ± 0.5%

Clear

Sassafras

Water thin

13.0 - 13.5

Low

None

None

Complete with water

Excellent

TEST:

Detergency:

Rinsability:

Flash Point:

Biodegradability:

Storage/Stability:

Weight Per Gallon:

Freeze/Thaw Stability:

Proper Shipping Name:

LIMIT:

Excellent

Excellent

168°F (TCC)

Completely

2 years


8.27 lbs. per gallon

Keep from freezing

Compounds, cleaning liquid

(Potassium Hydroxide, solution),

8, NA-1760, PG III

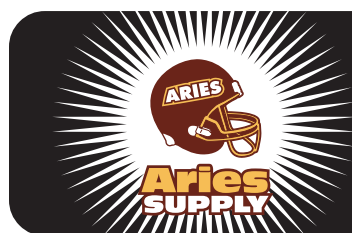

ARIES SUPPLY

P.O. Box 1337
Ashburn, VA 20146-1337
Toll Free 1-866-274-3780

Renaissance Park at Dulles
• 13858-A Park Center Road,
Herndon, VA 20171

SECTION 1-PRODUCT IDENTIFICATION AND SUPPLIER INFORMATION

Product Name: Show Off
Generic Name: High Productivity Stripper
Chemical Family: Solvent Detergent Blend
Formula: Proprietary

Supplier's Name:
 Aries Supply
Supplier's Address:
 P.O. Box 1337 Ashburn, VA 20146
Supplier's Phone #: 866-274-3780

SECTION 2-INGREDIENT INFORMATION

CHEMICAL NAME	CAS NO.	WT. %	PEL	TWA-TLV	STEL-TLV
Water	7732-18-5	to 100			
2-Butoxyethanol	111-76-2	40 to 50	25 ppm	25 ppm	N/A
Ethanolamine	141-43-5	5 to 10	N/A	8mg/M ³	N/A
Nonionic Surfactant	9016-45-9	0 to 5			
Potassium Fluoroalkyl Carboxylate (C8)	2991-51-7	0 to 5			
Perfume Oils	N/A	< 1			

SECTION 3-PHYSICAL DATA

Boiling Point (°F): 210 F.
Vapor Pressure: 20mm Hg @ 68 F.
% Volatile: 96+
Solubility in Water: Complete
Physical Description: Thin liquid with characteristic odor.

Specific Gravity: .994
Vapor Density (Air=1): >1
pH: 12.0 – 13.0
Evaporation Rate (Water=1): <1

SECTION 4-FIRE AND EXPLOSION HAZARD DATA

Flash Point (Method Used): 145 F. (TCC)
Upper Explosion Limit: 10.6
Lower Explosion Limit: 1.1
Extinguishing Media: Alcohol foam, water fog, CO₂ or dry chemical.
Special Firefighting Procedures: Wear self-contained breathing apparatus for confined areas. Keep fire exposed containers cool with water spray.
Unusual Fire and Explosion Hazards: Vapors heavier than air.

SECTION 5-REACTIVITY DATA

Stability: Stable

Hazards Decomposition Products: Alkaline vapors in a fire.

Hazardous Polymerization: None

Incompatibility (Materials to Avoid): Strong acids.

SECTION 6-STORAGE AND HANDLING INFORMATION

Combustible liquid- Avoid contact with heat, spark or open flame. Keep out of reach of children. For use by trained personnel only. Keep unauthorized personnel away when applying to floor. Keep container closed during storage. For institutional and industrial use only. Avoid contact with eyes, skin and clothing. Wear protective eyewear, gloves and footwear when handling. Avoid breathing of vapors. Use in well-ventilated area only.

SECTION 7-HEALTH HAZARDS AND FIRST AID

Effects of Overexposure:

Skin: Severe skin irritant. May cause moderate reddening, swelling, and possible skin damage.

Eyes: Severe eye irritant. Liquid and mists may damage eyes, causing corneal damage.

Inhalation: Vapors and mists may be irritating to mucous membranes in the nose, throat, and lungs.

Ingestion: Irritating and corrosive to the mouth and throat. May cause headache, nausea, abdominal pain, vomiting, and diarrhea. Excessive amounts may cause collapse.

First Aid Procedures:

Skin: Flush with water. Seek medical attention if irritation persists.

Eyes: Contact damage is immediate. Immediately flush with large quantities of water, holding eyelids open. Seek medical attention immediately.

Inhalation: Get to fresh air. Seek medical attention if irritation persists.

Ingestion: Do not induce vomiting. Drink large quantities of water. Seek medical attention immediately.

SECTION 8-SPECIAL PROTECTION INFORMATION

Respiratory Protection: Use NIOSH approved organic vapor respirator or self-contained breathing apparatus in confined or poorly ventilated areas.

Ventilation Requirements: Provide mechanical exhaust to keep TLV of Section 2 ingredients below acceptable limits.

Protective Gloves: Chemical resistant rubber or neoprene.

Eye Protection: Chemical splash goggles or full-face shield.

Other Protective Equipment: Eye wash station nearby. Protective outerwear and rubber boots should be worn when using.

SECTION 9-SPILL OR LEAK PROCEDURES

Steps to be taken in Case Material is Released or Spilled: Floors will become slippery. Avoid walking in product. Keep unessential personnel away. Mop up or otherwise absorb and hold disposal.

Waste Disposal Method: Any method in accordance with local, state and federal laws. Best method is to recycle or reuse for intended purpose. Consult local authorities for disposal in public sewer. Rinse container thoroughly before discarding in trash.

SECTION 10-REGULATORY INFORMATION

SARA Title III - Section 311/312 -Hazard Categories:

- No - Fire Hazard
- No - Sudden Release of Pressure Hazard
- No - Reactivity Hazard
- Yes - Immediate (acute) Health Hazard
- Yes - Delayed (chronic) Health Hazard

Shipping Information:

- FOR CONTAINERS > 1 Gallon : Cleaning Compound
- FOR 1 GALLON CONTAINERS : Cleaning Compound
- FOR CONTAINERS < 1 GALLON : Cleaning Compound

HMS Hazardous Materials Identification System

Health	3
Flammability	2
Reactivity	0
Personal Protection	B

FOR EMERGENCY MEDICAL OR TRANSPORT INFORMATION: CHEM-TEL, Inc. @ 800-255-3924 (24 hours, 7 days per week)

This product contains the following toxic chemical(s) subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act of 1986 and of 40 CFR 372.

CAS#	Chemical Name	Percent by Weight
111-76-2	Glycol Ether	46%

This product contains the following chemical(s) which have been established to be either a carcinogen or suspected carcinogen.

CAS#	Chemical Name	Percent by Weight
	None	

SECTION 11-OTHER INFORMATION

This company cannot anticipate all conditions of handling and use of this product. Therefore, this company accepts no responsibility for results obtained by the application of this information, or the safety and suitability of our products either alone or in combination with other products. It is the responsibility of the user to provide a safe workplace, using the health and safety information contained herein as a guide. This company will accept no liability for damages or loss incurred from the improper handling and use of this product