


WOLVERINE

High Solids/High Performance Extended Wear Finish

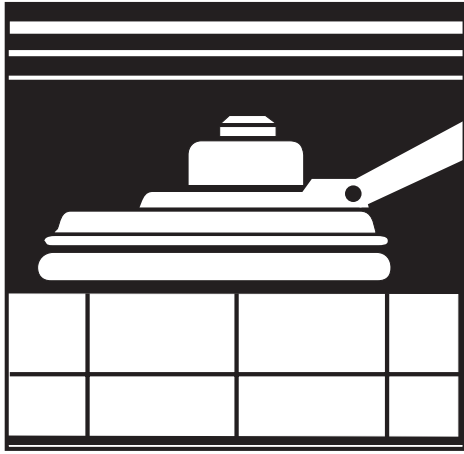

Product Description

Finally, a finish that wears as well as it looks. Provides diamond like clarity and brilliant gloss, along with extended wear properties never before available in one product. Will respond beautifully to conventional, high, or ultra-high speed floor equipment after weeks of wear and traffic when used with a spray buff or mop-on restorer. Saves enormous amounts of time and labor by requiring less maintenance.

Directions For Use

PREPARATION: If stripping is necessary, use a high quality product and follow directions accordingly. If floor is in good condition and stripping is not necessary; sweep up excess dirt and dust and then clean with a good quality cleaner to remove dirt and oils. Follow with a thorough rinsing and allow to dry completely.

FINISHING: Spread a liberal coat of finish evenly across the floor with a clean mop or applicator. Allow each coat to dry at least 1 hour before applying the next coat. Two or three coats are desired initially, depending on the condition of the floor and gloss desired.

MAINTENANCE: The floor may be maintained using a quality floor cleaner and damp mopping regularly. Spray buffing or mop-on restoring may also be done after sweeping up loose dirt and dust. Follow directions for each product accordingly.

This product meets the maximum content requirements for Volatile Organic Compounds (VOCs) as established by state and Federal regulations.

For Use On

Vinyl Tile	Linoleum
Vinyl Asbestos	Rubber Tile
Asphalt Tile	Terrazzo
	Sealed Wood
	Quarry Tile

Authorizations

Technical Data

Type:	Highly crosslinked acrylic
Non-volatile solids:	24.0±0.5%
Color:	Milky white
Odor:	Mild
pH:	8.5 - 9.0
Dry/Recoat Time:	1 hour min.
Slip Resistance:	.56 - .60 (ASTM-D2047-82)
Gloss:	95+ specular

Leveling:	Excellent
Buffability:	Spray buff or restorer
Removability:	With instant type strippers
Detergent Resistance:	Excellent
Waterspot Resistance:	Excellent
Heel Mark Resistance:	Excellent
VOC Content:	0.361 lbs./gal.
Storage/Stability:	2 years
Freeze/Thaw Stability:	Keep from freezing
Weight per Gallon:	8.65 lbs./gal.
Coverage:	1800-2200 ft ² per gal.



ARIES SUPPLY

P.O. Box 1337
Ashburn, VA 20146-1337 • 13858-A Park Center Road,
Toll Free 1-866-274-3780 Herndon, VA 20171

SECTION 1-PRODUCT IDENTIFICATION AND SUPPLIER INFORMATION

<p>Product Name: Wolverine Generic Name: High Wear/ High Solids Floor Finish Chemical Family: Acrylic Wax Blend Formula: Proprietary</p>	<p>Supplier's Name: Aries Supply Supplier's Address: P.O. Box 1337, Ashburn, VA 20146-1337 Renaissance Park at Dulles, 13858-A Park Center Road, Herndon, VA 20171 Supplier's Phone #: (866) 274-3780</p>
---	---

SECTION 2-INGREDIENT INFORMATION

CHEMICAL NAME	CAS NO.	WT. %	PEL	TWA-TLV	STEL-TLV
Water	7732-18-5	to 100			
Acrylic Copolymer Dispersion	63744-68-3	45 to 50			
Resin Solution	65405-63-2	5 to 10			
Polyethylene Wax	68441-17-8	5 to 10			
Tributoxy Ethyl Phosphate	78-51-3	0 to 5			
Diethylene Glycol Monomethyl Ether	111-77-3	0 to 5			

SECTION 3-PHYSICAL DATA

Boiling Point (°F): 212 F.
Vapor Pressure: 20mm Hg @ 68 F.
% Volatile: 70+
Solubility in Water: Complete
Physical Description: Thin milky liquid with characteristic odor.

Specific Gravity: 1.039
Vapor Density (Air=1): >1
pH: 8.5-9.0
Evaporation Rate (Water=1): <1

SECTION 4-FIRE AND EXPLOSION HAZARD DATA

Flash Point (Method Used): N/A
Upper Explosion Limit: N/A
Lower Explosion Limit: N/A
Extinguishing Media: N/A
Special Firefighting Procedures: Non Flammable
Unusual Fire and Explosion Hazards: N/A

SECTION 5-REACTIVITY DATA

Stability: Stable
Hazards Decomposition Products: Will not occur.

Hazardous Polymerization: None
Incompatibility (Materials to Avoid): None

SECTION 6-STORAGE AND HANDLING INFORMATION

Keep out of reach of children. For use by trained personnel only. Keep unauthorized personnel away when applying to floor. Keep container closed during storage. For institutional and industrial use only. Avoid contact with eyes, skin and clothing. Avoid breathing of vapors. Use in well-ventilated area.

SECTION 7-HEALTH HAZARDS AND FIRST AID

Effects of Overexposure:
Skin: Prolonged or repeated contact may cause dermatitis.
Eyes: Eye irritant. May cause redness or swelling.
Inhalation: Vapors may cause headache, dizziness, nausea.
Ingestion: May be irritating to the mouth, throat, and gastrointestinal system.
 Vomiting and diarrhea expected with large doses.

First Aid Procedures:

Skin: Flush with water. Seek medical attention if irritation persists.
Eyes: Flush with large quantities of water, holding eyelids open. Seek medical attention.
Inhalation: Remove victim to fresh air and monitor.
Ingestion: Dilute with 2 glasses of water. Seek medical attention if symptoms persist.

SECTION 8-SPECIAL PROTECTION INFORMATION

Respiratory Protection: Use in well-ventilated area.
Ventilation Requirements: Provide local exhaust to keep TLV of Section 2 ingredients below acceptable limit.
Protective Gloves: Chemical resistant rubber or neoprene.
Eye Protection: Safety glasses or chemical splash goggles
Other Protective Equipment: Protective foot wear (rubber boots) should be worn when using product on floor.

SECTION 9-SPILL OR LEAK PROCEDURES

Steps to be taken in Case Material is Released or Spilled: Floors will become slippery. Avoid walking in product. Keep unessential personnel away. Mop up or otherwise absorb and hold disposal. Avoid discharge to sewer or open waterways.
Waste Disposal Method: Any method in accordance with local, state and federal laws. Best method is to recycle or reuse for intended purpose. Consult local authorities for disposal in public sewer. Do not dispose of into storm drain, stream, river or to ground. Rinse container thoroughly before discarding in trash.

SECTION 10-REGULATORY INFORMATION

SARA Title III - Section 311/312 -Hazard Categories:
 No - Fire Hazard
 No - Sudden Release of Pressure Hazard
 No - Reactivity Hazard
 Yes - Immediate (acute) Health Hazard
 No - Delayed (chronic) Health Hazard

Shipping Information:
 FOR CONTAINERS > 1 Gallon : Liquid Floor Wax
 FOR 1 GALLON CONTAINERS : Liquid Floor Wax
 FOR CONTAINERS < 1 GALLON : Liquid Floor Wax

HMIS Hazardous Materials Identification System

Health	1
Flammability	0
Reactivity	0
Personal Protection	A

FOR EMERGENCY MEDICAL OR TRANSPORT INFORMATION: CHEM-TEL, Inc. @ 800-255-3924 (24 hours, 7 days per week)

This product contains the following toxic chemical(s) subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act of 1986 and of 40 CFR 372.

CAS#	Chemical Name	Percent by Weight
	None	

This product contains the following chemical(s) which have been established to be either a carcinogen or suspected carcinogen.

CAS#	Chemical Name	Percent by Weight
	None	

SECTION 11-OTHER INFORMATION

This company cannot anticipate all conditions of handling and use of this product. Therefore, this company accepts no responsibility for results obtained by the application of this information, or the safety and suitability of our products either alone or in combination with other products. It is the responsibility of the user to provide a safe workplace, using the health and safety information contained herein as a guide. This company will accept no liability for damages or loss incurred from the improper handling and use of this product